


RGBW
24V DC
5 Wire
DMX Dimming

35

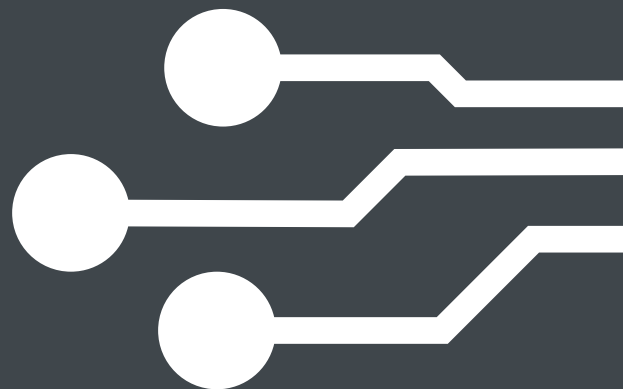

RGBW - 12V DC - 5 Wire Dynamic Pixel DMX Dimming

Wiring Diagram


RGBW
24V DC
5 Wire
DMX Dimming

35



Aqualux Codes

- AQD24-040
- AQD24-100
- AQD24-240
- AQD-400-ENT-SPLAY1
- AQD-400-ENT-STORM8

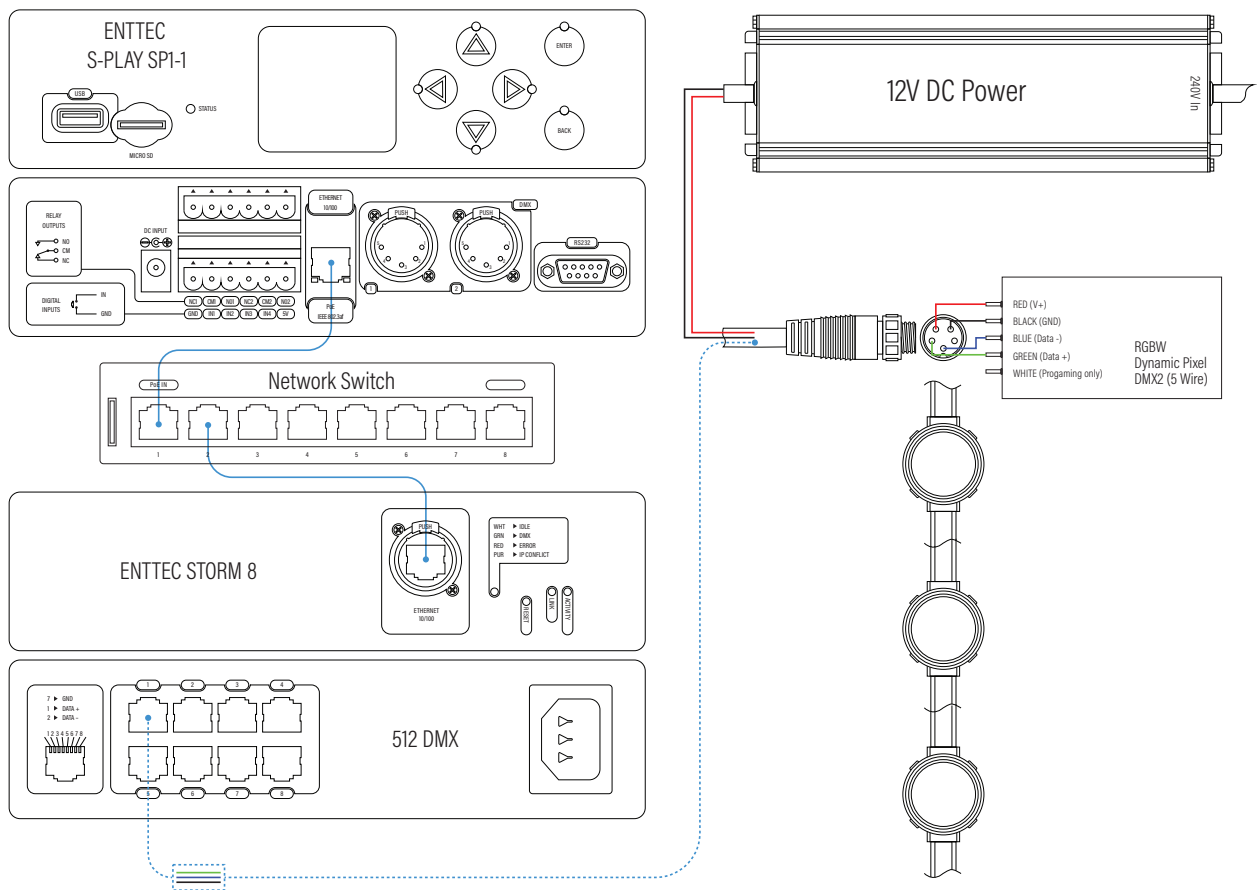

Setup allows for app control, calendar scene triggers, operation from control systems and scene triggering from external sources. 18 Universes of DMX per S-Play Unit (Multiple units can be used for larger installations). 8 and 24 port Storm units available. Max 8m strip run for single end feed and 16m double end feed. Strip is directional (check cable entries and entry and exit tail lengths). Strip is addressable using DMX Writer.