


Mono 24V AC 2 Wire Phase Cut Dimming

30

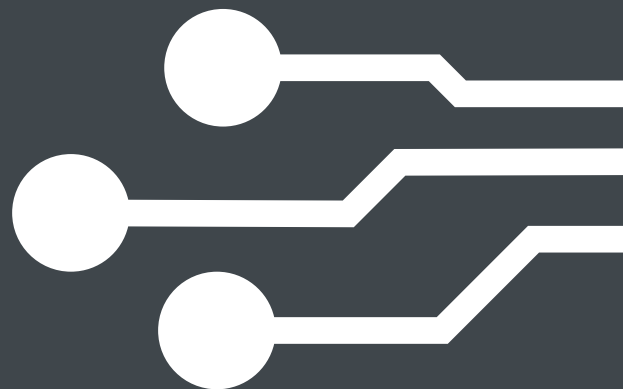

Mono - 24V AC - 2 Wire - Phase Cut Dimming

Mono
24V AC
2 Wire
Phase Cut Dimming




Wiring Diagram

Aqualux Codes

AQ012-020
AQ012-050
AQ012-100
AQ012-150
AQ012-200
AQ024-050
AQ024-100
AQ024-200
AQ024-300

Phase-cut Installation Notes

Diginet MEDM Phase Adaptive Dimmer recommended
80% PSU loading suggested for best dimming performance
Not compatible with Leading-edge phase cut dimmers
Site specific conditions, including off-peak ripple frequencies
and other local devices may affect performance
All mains wiring must be performance by a licensed electrician and
in accordance with local wiring regulations

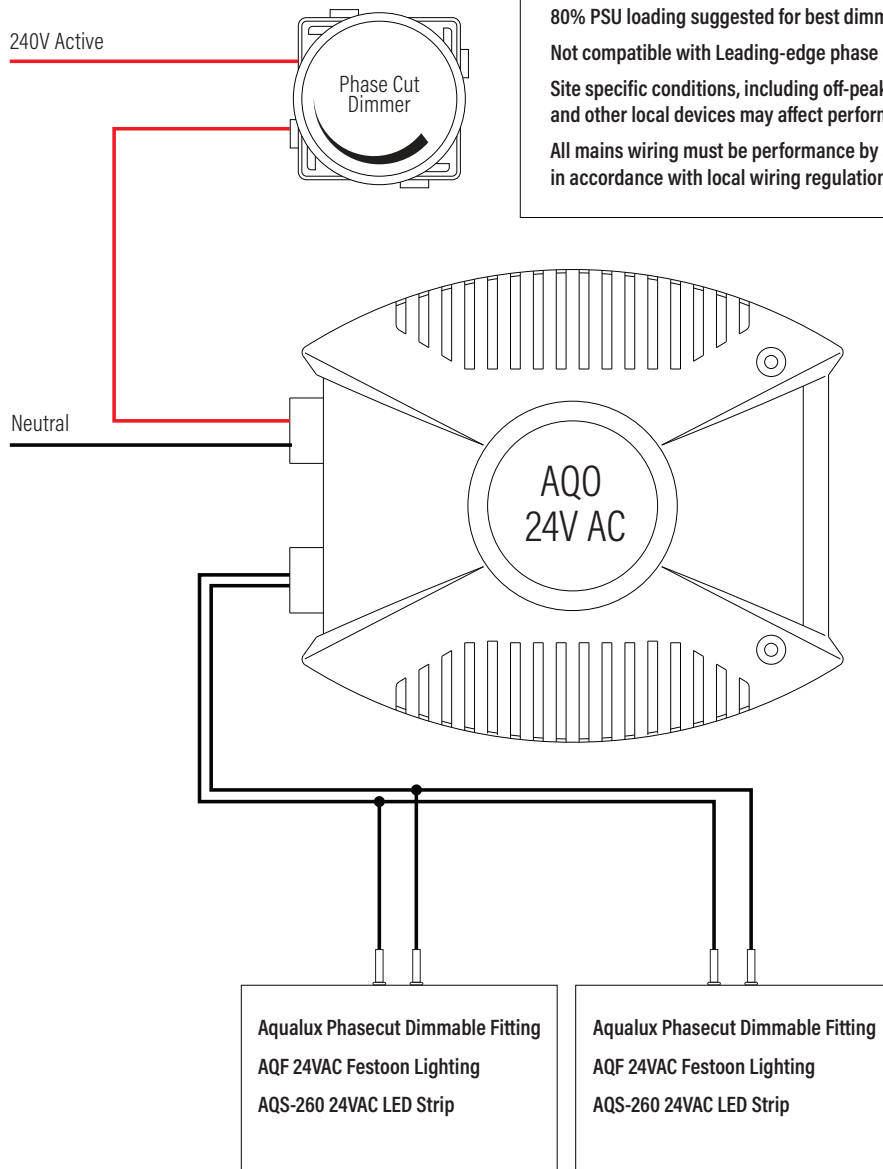

2 Fitting Example only

Aqualux fittings must be ordered as Phasecut dimmable. Driver code "D"